




Featured Products August 2010

Dyn-O-Loc

Conduit can be used to support duct sizes over 48" or smaller duct in high pressure applications. Dyn-O-Locs insert into the hollow ends of conduit to provide a means of attaching the conduit to the duct.

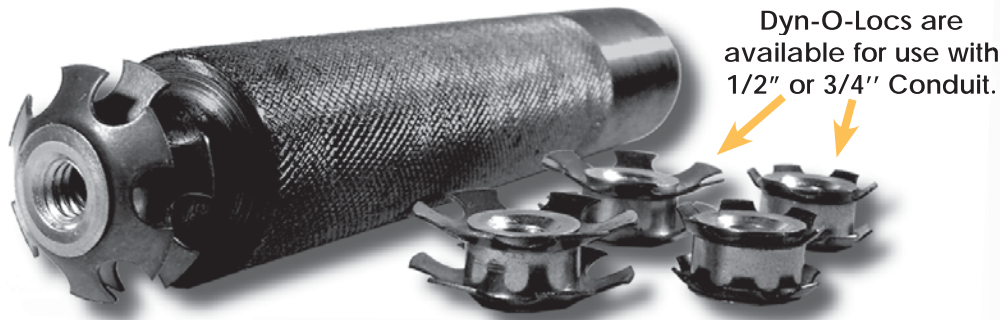

The Dyn-O-Loc Tool aids installation and assures accurate spacing.




Installed lock is pull tested to withstand over 1900 lbs.



Dyn-O-Claw now available!


The Dyn-O-Claw is designed to join conduits for more stability and to eliminate their vibration in the duct

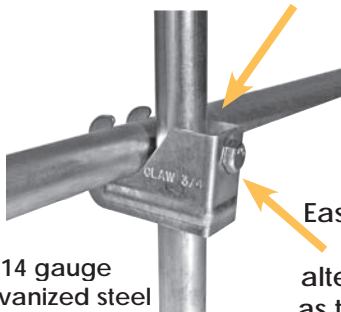

14 gauge galvanized steel

Easier and faster than other alternatives such as ties or welding

Item #	Code	Description	Pkg.	Weight (lbs.)
21088	DOMDOC12	1/2" Dyn-O-Claw	250/Box	40
21089	DOMDOC34	3/4" Dyn-O-Claw	200/Box	40

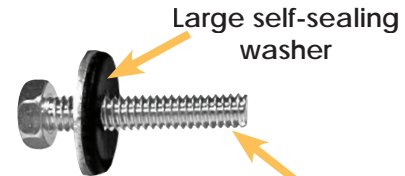

We put the washer on the bolt, so you don't have to!

Long bolt for easier installation

Ordering Information

Item #	Code	Description	Packaging	Weight (lbs.)
21097	DOMRL12	1/2" Dyn-O-Loc	250/Box	13
21098	DOMRL34	3/4" Dyn-O-Loc	250/Box	13
21076	RLT	Dyn-O-Loc Tool	1 each	1

Packaging

Locks conveniently packed in separate poly bag.

Bolts (with washer attached) packed underneath locks.

